

## ИНФОРМАТИКА

UDC 539.3

MSC 74A45

**On optimal design of reinforced concrete columns subjected to combined biaxial bending and axial load***A. A. Ibraheem, Yu. G. Pronina*

St Petersburg State University, 7–9, Universitetskaya nab., St Petersburg, 199034, Russian Federation

**For citation:** Ibraheem A. A., Pronina Yu. G. On optimal design of reinforced concrete columns subjected to combined biaxial bending and axial load. *Vestnik of Saint Petersburg University. Applied Mathematics. Computer Science. Control Processes*, 2022, vol. 18, iss. 2, pp. 218–230. <https://doi.org/10.21638/11701/spbu10.2022.203>

This paper presents a new procedure for designing rectangular columns subjected to combined biaxial bending and axial load. The new procedure is realized within a new comprehensive structural analysis software for building analysis and design. Compared to existing engineering packages, the new program does not require pre-setting the distribution of bars before designing and gives more detailed results: not only the required reinforcement amount, but also a distribution of bars of a certain diameter along the sides of the column section. The program starts by inserting four reinforcement bars into the corners of the column, and checks if this reinforcement bars provide required resistance to the applied loads. If the reinforced concrete column fails to withstand the applied loads, then the program increases the reinforcement by adding new bars and checks required resistance again. This process continues until the reinforced concrete column is able to withstand the applied loads. The proposed procedure is realized within following methods: (I) calculation of the so-called column capacity interaction volume using a large number of interaction curves (usually 24 curves); (II) the elliptical approximation of the column capacity interaction volume (the load contour equation). Within the second method, the program calculates two interaction curves only: the first curve is for an eccentric case in  $X$  direction and the second curve is for an eccentric case in  $Y$  direction. In both methods, the interaction curves are calculated according to American concrete institute standards. The use of the new procedure within the second method gives results very close to the first method (the most accurate), but it requires much less time for calculation. This is very important when designing large structures with multiple columns.

*Keywords:* reinforced concrete column, biaxial bending, axial load, capacity interaction volume, section designer.

---

© St Petersburg State University, 2022

**1. Introduction.** Currently, the analysis and design of structures is carried out using commercial finite elements software packages (Computers and structures Inc. (CSI) programs [1], Autodesk programs [2], Bentley systems programs [3]). In the design phase, these programs calculate the reinforcement amount in structural elements required to resist the applied loads, and the results are different, depending on the code and the methods used in the calculation.

The design of a column using CSI programs requires pre-setting the dimensions of the concrete section, the concrete properties, the reinforcement bars diameter, and the reinforcement bars material properties. Also, before the designing process, the user must define the distribution of the reinforcement bars along the both principal axes of the section, and the result of design is given in the form of reinforcement amount (the reinforcement area ( $\text{mm}^2$ ) required in the concrete section) corresponding to the distribution of bars chosen. The choice of the distribution of bars in the section before design greatly affects the design results, and the distribution chosen may not be the best distribution of bars (which achieves the required resistance with the least amount of reinforcement required) within the concrete section.

In this work a new procedure is presented, which is realized within a new program for designing rectangular columns subjected to combined biaxial bending moments and axial load. Using this new program, the user does not need to choose the distribution of bars before designing, the new procedure calculates the required reinforcement amount and the appropriate distribution of the reinforcement bars within the column section.

This program has been implemented as a section designer and subprogram within a comprehensive structural analysis software for building analysis and design [4, 5].

**2. Numerical procedures.** First, recall that column bending is uniaxial when the axial force acts at an eccentricity along one of the principal axes (in a plane of section symmetry), and column bending is biaxial when the force is applied at an eccentricity that is not along a principal axis. A uniaxial interaction curve defines the force-moment strength along a single plane of a section subjected to an axial force  $\mathbf{P}$  and a uniaxial bending moment  $\mathbf{M}$ . In other words, an interaction curve displays the combinations of the maximum allowable bending moment and axial capacities of the column. The biaxial bending resistance of an axially loaded column can be represented schematically as a failure surface formed by a series of uniaxial interaction curves drawn radially around the  $\mathbf{P}$  axis.

In this section, the algorithm of calculation of the required reinforcement amount to resist the applied loads using the new procedure is described. The proposed procedure is realized within the two following methods.

(I). Calculation of the column capacity interaction volume using a large number of interaction curves (usually 24 curves). The column capacity interaction volume is a volume contained within the three-dimensional interaction failure surface. This surface is represented numerically as a series of discrete points [6]. The coordinates of these points are determined by rotating the linear strain diagram in three dimensions over the section. The linear strain diagram limits the maximum concrete strain  $\varepsilon_u$  at the extremity of the section to 0.003, ACI [6]. The formulation is based consistently on the general principles of ultimate strength design ACI [7]. The default number of the calculated curves is 24 (from 0 degree increasing by 15 to 345 degrees). The program stores this volume as 24 curves, and each curve is a group of 3D points (the axial force ( $P_n$ ), the moment about local axis-X ( $M_{nx}$ ), and the moment about local axis-Y ( $M_{ny}$ )).

(II). The elliptical approximation of the column capacity interaction volume (the load contour equation). Within this method, the program calculates two interaction curves only,

the first curve is for an eccentric case in  $X$  direction and the second curve is for an eccentric case in  $Y$  direction.

In both methods the interaction curves are calculated according to ACI standards.

**2.1. Calculation of the interaction curves.** In this section, an application of ACI standards to the calculation of the column interaction curves is presented.

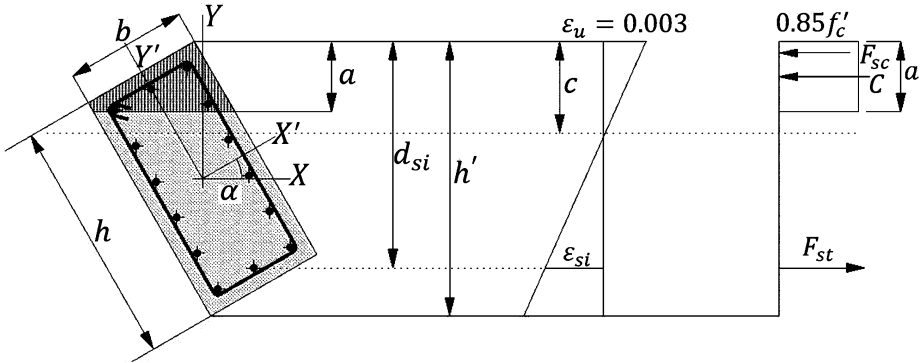


Fig. 1. Stress and strain distribution in a column section rotated by an angle  $\alpha$

Let  $\alpha$  denote the rotation angle of the linear strain diagram over the section (Fig. 1). The sequence of calculations of the interaction curve is presented as follows:

- calculation of the corners coordinates of the section with respect to the center of the section:

$$x'_i = x_i \cos(\alpha) + y_i \sin(\alpha), \quad y'_i = -x_i \sin(\alpha) + y_i \cos(\alpha),$$

where  $x'_i, y'_i$  are the corners points coordinate in the global system;  $x_i, y_i$  are the corners points coordinate in the local system with the axes directed along the principal axes of the cross section of the column. Both coordinate systems have an origin at the center of the cross section (Fig. 1);

- calculation of the height of the strain diagram ( $h'$ ), which is the distance between the extreme concrete fiber in tension and the extreme concrete fiber in compression in accordance with Fig. 1;

- calculation of the steel bars coordinates with respect to the center of the section:

$$x'_{si} = x_{si} \cos(\alpha) + y_{si} \sin(\alpha), \quad y'_{si} = -x_{si} \sin(\alpha) + y_{si} \cos(\alpha),$$

where  $x'_{si}, y'_{si}$  are the steel bars coordinate in the global system;  $x_{si}, y_{si}$  are the steel bars coordinate in the local system;

- calculation of the distance ( $d_{si}$ ) between the center of each steel bar and the extreme concrete fiber in compression:  $d_{si} = h'/2 - y'_{si}$ ;

- calculation of the interaction curve points for each  $\alpha$  (as described below).

The point components over each curve are the axial force ( $P_n$ ), the moment about local axis-X ( $M_{nx}$ ), and the moment about local axis-Y ( $M_{ny}$ ). The default number of the points is 10.

The coordinates of the first point of the interaction curve points are calculated corresponding to the condition when the column is exposed to an axial compressive force only (pure compression). In this case the point components are [6]

$$M_{nx} = 0, \quad M_{ny} = 0, \quad P_n = 0.85\Omega f'_c(A_g - A_s) + A_s f_y,$$

where  $\Omega = 0.8$  is the coefficient of resistance reduction;  $A_g$  is the area of the section;  $A_s$  is the area of the entire reinforcement in the section;  $f'_c$  is the concrete compressive strength;  $f_y$  is the rebar yield stress.

The coordinates of the last point of the interaction curve points are calculated corresponding to the condition when the column is exposed to an axial tension force only (pure tension). In this case the point components are

$$M_{nx} = 0, \quad M_{ny} = 0, \quad P_n = -A_s f_y.$$

The rest of the interaction curve points are calculated as follows.

1. Calculation of the distance  $c$  between the neutral axis of the section and the extreme concrete fiber in compression:  $c = h' - (n - 1)\Delta c$ , where  $n$  is the order of this point;  $\Delta c = h'/N - 2$ , and  $N = 10$  is the total number of the interaction curve points.

2. Calculation of the compressive force in concrete ( $C_c$ ):  $C_c = 0.85 f'_c A_c$  [6], where  $A_c$  is the compressive concrete area (the hashed polygon in Fig. 1). The depth of the equivalent rectangular block  $a$  is calculated as  $a = \beta_1 c$ , here  $c$  is the depth of the stress block in compression strain;  $\beta_1 = 0.85 - 0.05 ((f'_c - 4000)/1000)$ ,  $0.65 \leq \beta_1 \leq 0.85$  [6].

3. Calculation of the force in each reinforcement bar ( $F_{si}$ ). The strain in each bar ( $\varepsilon_{si}$ ) can be calculated from the strain diagram as  $\varepsilon_{si} = ((c - d_{si})/c)\varepsilon_u$ , where ( $\varepsilon_u = 0.003$ ) is the ultimate strain at the extreme concrete fiber in compression.

The stress in each reinforcement bar ( $f_{si}$ ) is calculated as [6]

$$f_{si} = E\varepsilon_{si} \dots i f \varepsilon_{si} \leq \varepsilon_y, \quad f_{si} = f_y \dots i f \varepsilon_{si} > \varepsilon_y,$$

here  $E$  is the modulus of elasticity of reinforcement;  $\varepsilon_y = 0.002$  is the strain at  $f_y$ . The stress sign is considered positive when the bar is compressed and negative when the bar is tensioned.

The force in each reinforcement bar ( $F_{si}$ ) is calculated as  $F_{si} = f_{si} A_{si}$ , where  $A_{si}$  is the area of the reinforcement bar section.

4. Calculation of the total axial force in the section ( $P_n$ ) corresponding to the point  $n$ :

$$P_n = C_c + \sum_{i=1}^{N_s} F_{si},$$

here  $N_s$  is the total number of the reinforcement bars in the section.

5. Calculation of the bending moments ( $M_{nx}, M_{ny}$ ) about the center of the section corresponding to the point  $n$ :

$$M_3 = M_{nx} = C_c y_c + \sum_{i=1}^{N_s} F_{si} y_{si}, \quad M_2 = M_{ny} = C_c x_c + \sum_{i=1}^{N_s} F_{si} x_{si},$$

where  $x_c, y_c$  are the coordinates of the center of the compressive concrete area (the hashed polygon in Fig. 1).

**2.2. Calculation of the required amount of reinforcement using the column capacity interaction volume.** The interaction volume determined in accordance with the method described in previous section is used to calculate the amount of reinforcement required in the column to withstand the applied loads.

The applied loads are represented as 3D point within the coordinate system shown in Fig. 2. The point components are the applied axial force ( $p$ ), the applied bending moment

about the local axis-2 parallel to  $Y$  ( $m_2 = m_{ny}$ ), and the applied bending moment about the local axis-3 parallel to  $X$  ( $m_3 = m_{nx}$ ). The reinforced concrete column is considered capable of resisting the applied loads if the point  $(p, m_2, m_3)$  lies within the capacity interaction volume.

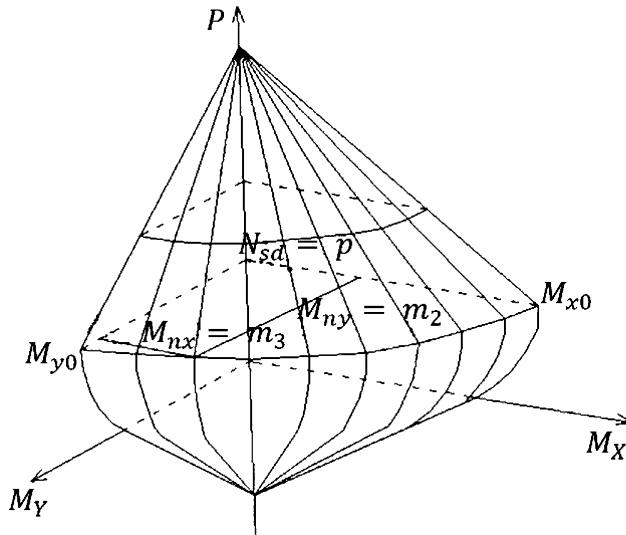


Fig. 2. Typical 3D interaction curves for ultimate strength of column cross section

The new procedure for calculating the required amount of reinforcement is as follows.

The program starts by inserting four reinforcement bars in the corners of the column, calculates the interaction volume, and checks if the point  $(p, m_2, m_3)$  lies inside the volume. If the point is outside the volume, then the program increases the reinforcement by adding new bars and recalculates the interaction volume and checks again. This process continues until the point lies inside the interaction volume. The methodology used to design the column section illustrated on Fig. 3.

The program cuts the interaction volume by a horizontal plan at the  $P$  coordinate equal to the applied axial force ( $p$ ), and it gets a plan cross section with 2D coordinates as shown in Fig. 4. The interaction volume formed by 24 interaction curves drawn radially around the  $\mathbf{P}$  axis. Each curve intersects with the plan cross section at a 2D point with two moment components (the moment about local axis-2 ( $M_2 = M_Y$ ), the moment about local axis-3 ( $M_3 = M_X$ )). These points perform a plane polygon (the hashed polygon in Fig. 4). Thus, the program considers that the 3D point  $(p, m_2, m_3)$  lies inside the interaction volume if it finds that the 2D point  $(m_2, m_3)$  is inside the plane polygon calculated. The accuracy of the calculation increases with the increase of the number of the curves, but that requires an additional computational effort.

**2.3. Calculation of the required amount of reinforcement using elliptical approximation of the column capacity interaction volume.** Instead of calculating 24 interaction curves to form the column interaction volume, an approximate method can be used to form an approximate interaction volume and to calculate the required amount of reinforcement. This method can be applied for concrete rectangular cross section reinforced by regular reinforcement only, and it requires much less time for calculation, which is very important when designing large structures with a large number of columns.

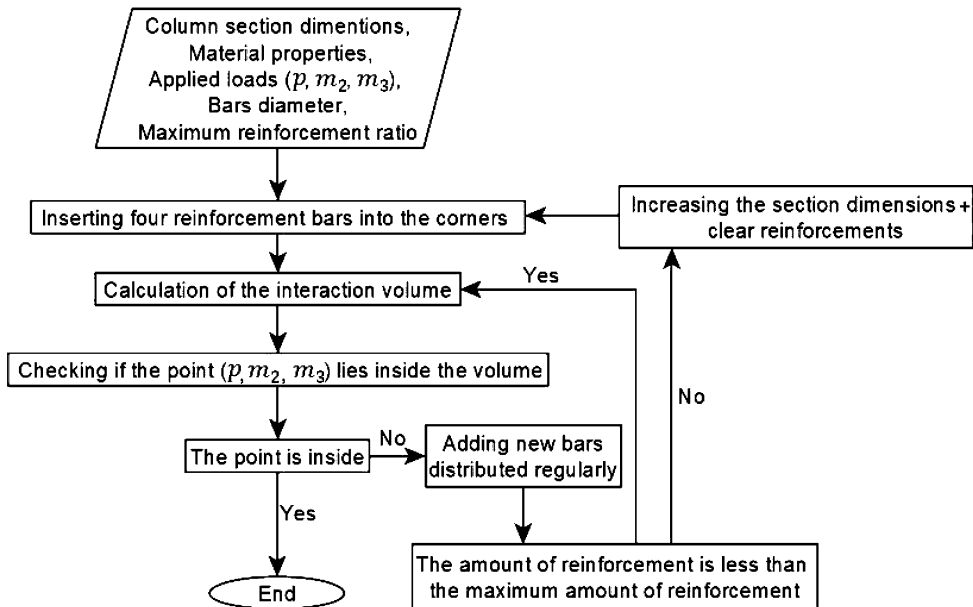


Fig. 3. The methodological scheme for column section design

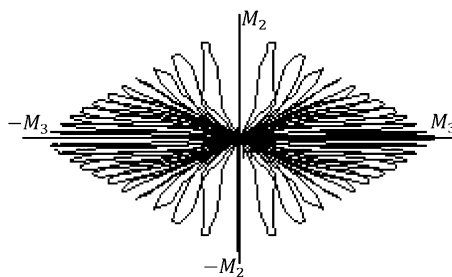


Fig. 4. A plan cross section in the interaction volume at  $P = p$

Moment contours represent planes of constant axial force (see Fig. 2). These contours are similar to a series of ellipses which may be described by the following relationship (the load contour equation) [8, 9]:

$$\left(\frac{M_{nx}}{M_{x0}}\right)^{\theta} + \left(\frac{M_{ny}}{M_{y0}}\right)^{\theta} = 1,$$

where  $M_{nx}, M_{ny}$  are the applied bending moments about  $X$  and  $Y$  sectional axes respectively ( $M_{nx} = m_3$  and  $M_{ny} = m_2$ );  $M_{x0}$  is the nominal bending moment strength if axial load were eccentric only about the  $X$  axis;  $M_{y0}$  is the nominal bending moment strength if axial load were eccentric only about the  $Y$  axis;  $\theta$  is the axial load contour exponent. The program calculates  $\theta$  [10]:

$$\theta = 1.15 \left(\frac{b}{h}\right)^{-0.01} \mu_{sx}^{-0.03} \mu_{sy}^{-0.03} n_{sd}^{-0.07},$$

here  $b$  is the column cross section width;  $h$  is the column cross section height;  $\mu_{sx}, \mu_{sy}$  are the mechanical ratio of steel reinforcement laid parallel to  $X$  and  $Y$  sectional axes respectively;  $n_{sd}$  is the normalized acting axial load [10]:

$$\mu_{sx} = \frac{A_{sx}f_{yd}}{0.85f_{cd}bh}, \quad \mu_{sy} = \frac{A_{sy}f_{yd}}{0.85f_{cd}bh}, \quad n_{sd} = \frac{N_{sd}}{0.85f_{cd}bh},$$

where  $A_{sx}, A_{sy}$  are the area of reinforcement laid parallel to  $\mathbf{X}$ , and  $\mathbf{Y}$  axis respectively;  $f_{cd}$  is the design compressive strength of concrete;  $f_{yd}$  is the design yield strength of steel;  $N_{sd}$  is the applied axial load ( $p$ ).

The new procedure for calculating the required amount of reinforcement is as follows.

In order to calculate  $M_{X0}$ , the program calculates the interaction curve corresponding to the angle  $\alpha = 0$ , because this curve represents the case in which the load is eccentric only about the  $\mathbf{X}$  axis. From the calculated curve we can get  $M_{X0}$  which is the moment value corresponding to  $N_{sd} = p$ . And similarly, in order to find  $M_{Y0}$ , the program calculates the interaction curve corresponding to the angle  $\alpha = 90$ , because this curve represents the case in which the load is eccentric only about the  $\mathbf{Y}$  axis. And from the calculated curve we can get  $M_{Y0}$  which is the moment value corresponding to ( $N_{sd} = p$ ).

The program calculates the required reinforcement amount assuming that this amount is distributed regularly along the sides of the column section. Note that deviation from a regular configuration of any discontinuities may lead to a decrease in the strength of a structural element [11]. However, the mutual arrangement of periodic inhomogeneities can also have a noticeable effect on the mechanical properties [12].

The program starts by inserting four reinforcement bars in the corners of the column, and calculates  $\theta, M_{x0}$  and  $M_{y0}$ . The verification of the section strength subjected to combined biaxial bending moments ( $m_2, m_3$ ) and axial load ( $p$ ) can be performed by checking the following inequality:

$$\left(\frac{m_3}{M_{x0}}\right)^\theta + \left(\frac{m_2}{M_{y0}}\right)^\theta \leq 1,$$

and if the inequality is not achieved then the program increases the reinforcement amount by adding new reinforcement bars and checks again. This process continues until the inequality is achieved.

**3. Computation example.** Herein, we compare the results obtained by the use of the new program developed in this work, and the results produced by ETABS (commercial finite elements software from CSI [1]) in designing reinforced concrete columns subjected to combined biaxial bending and axial load.

**3.1. Comparison in calculating the column interaction curves.** The column section to be designed is shown in Fig. 5. Its width is 350 mm, its height is 600 mm, the column is reinforced by 12 bar with diameter equal 25 mm, the cover thickness is 30 mm, the concrete compressive strength ( $f'_c$ ) is 27.58 MPa, and the rebar yield stress ( $f_y$ ) is 413.69 MPa.

The interaction volume can be plotted in tables and diagrams, as shown in Fig. 6.

Table 1 and Fig. 7 presents a comparison between ETABS and the new program in calculating the interaction curve for  $\alpha = 30$  degree (the rotation angle of the linear strain diagram over the column section).

The diagrams plotted in Fig. 7,  $a, b$  show a match in the column interaction curves computed by both programs.

**3.2. Comparison in calculating the required reinforcement amount for the column.** The column section to be designed is with properties: the width is 500 mm, the

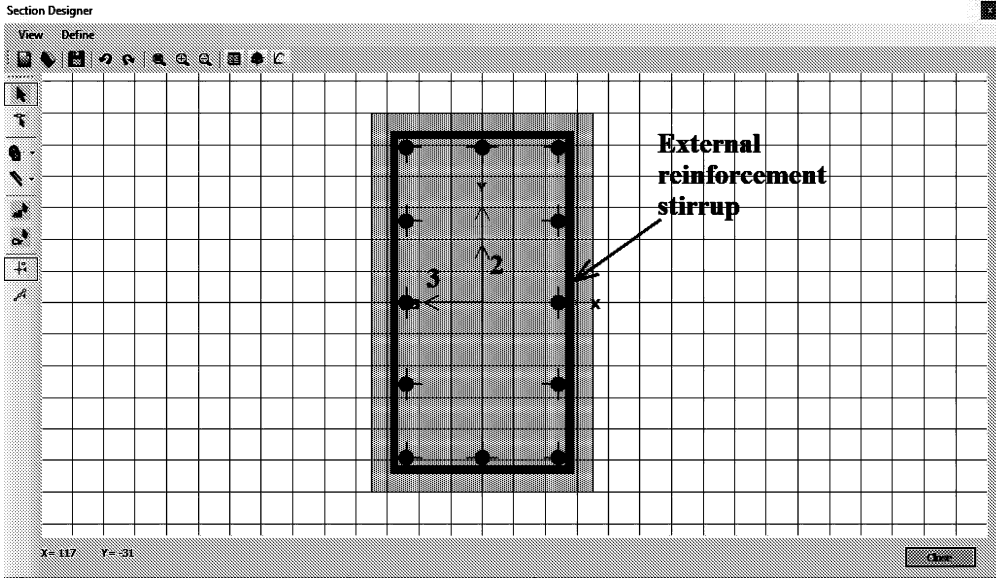


Fig. 5. The shape of the rectangular reinforced column section used in the example

Table 1. The interaction curve points coordinates (for  $\alpha = 30^\circ$ ), calculated by ETABS and the new program

Point	The new program			ETABS		
	$P$ , kN	$M_2$ , kN-m	$M_3$ , kN-m	$P$ , kN	$M_2$ , kN-m	$M_3$ , kN-m
1	3755.32	0.00	0.00	3755.29	0.00	0.00
2	3755.32	32.07	127.13	3755.29	25.00	101.19
3	3560.71	45.21	210.07	3685.45	44.14	188.76
4	2997.82	48.92	292.60	3028.30	49.03	288.80
5	2376.37	53.13	351.88	2279.45	54.11	356.97
6	1408.44	61.55	395.91	1357.28	61.79	393.89
7	833.09	69.61	441.12	696.96	71.92	441.07
8	6.87	81.41	438.76	-204.74	82.20	408.15
9	-1058.80	70.30	258.15	-1194.26	66.08	230.21
10	-1943.07	29.81	63.01	-1980.00	25.72	53.94
11	-2193.15	0.00	0.00	-2193.24	0.00	0.00

height is 300 mm, the cover thickness is 25 mm, the tie bar size is 10 mm, the concrete compressive strength ( $f'_c$ ) is 27.58 MPa, the rebar yield stress  $f_y$  is 413.69 MPa, the applied axial force ( $p$ ) is 1500 kN, the applied moments ( $m_2, m_3$ ) are 150 kN-m, the interaction curves number is 48, and the interaction points for each curve is 11 points.

Table 2 presents the reinforcement amount calculated by the new program using the two methods described above (method I of the accurate calculation of the column interaction volume, method II of the elliptical approximation of the column interaction volume) for different diameters of the reinforcement bars.

Table 2 shows that both methods used in the new program provide the same reinforcement amount.

The distribution of reinforcing bars in the columns of residential buildings is performed regularly on the perimeter of the external reinforcement stirrup confinement the concrete section shown in Fig. 5. Suppose  $d_{\max}$ ,  $d_{\min}$  are the allowable maximum and minimum



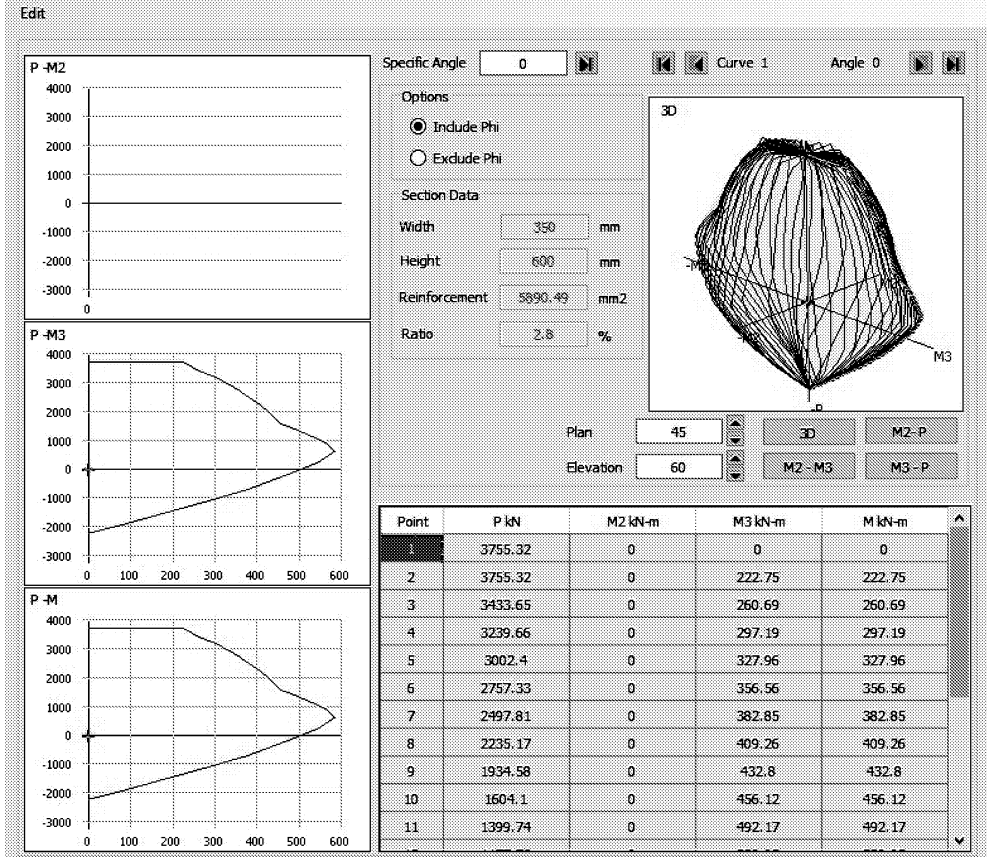


Fig. 6. Interaction volume calculated using the new program

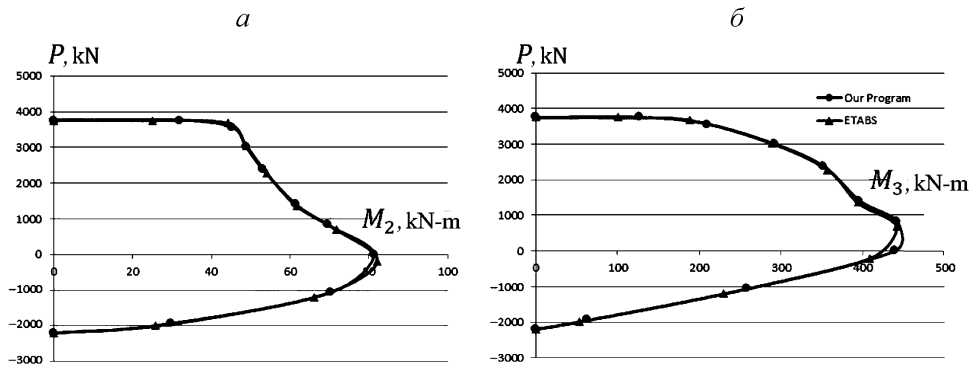


Fig. 7.  $P-M_2$  (a) and  $P-M_3$  (b) diagrams for the interaction curve for  $\alpha = 30^\circ$

spacing of the reinforcing bars respectively (these values are from the design code);  $d$  is the spacing between bars;  $W$  is the width of the reinforcement stirrup;  $H$  is the height of the reinforcement stirrup;  $D$  is the diameter of the reinforcement stirrup. Thus, the program

*Table 2. The reinforcement amount (mm<sup>2</sup>)*

Bar size, mm	Method I	Method II
12	7012	7012
14	7081	7081
16	7238	7238
18	7125	7125
20	7540	7540
25	7854	7854

forms an iterative loop with value  $d$  starting from  $d_{\max}$  to  $d_{\min}$  in a decrement of 1 cm, and at each value of the variable  $d$ , the program calculates the number of bars distributed over the width and height of the reinforcement stirrup as

$$N_H = ((H - D)/d) - 1, \quad N_W = ((W - D)/d) - 1,$$

where  $N_H$  is the number of bars distributed over the height of the reinforcement stirrup (along the principal axis-2 of the column section);  $N_W$  is the number of bars distributed over the width of the reinforcement stirrup (along the principal axis-3 of the column section).

At each looping step, the program checks if the amount of reinforcement achieves the required resistance. If the amount of reinforcement is sufficient, then the program terminates the iterative loop, otherwise it continues the looping.

Table 3 presents the bars number along the principal axes of the column section calculated by the new program, for different diameters of the reinforcement bars.

*Table 3. The distribution of bars in the column section*

Bar size, mm	Reinforcement amount, mm <sup>2</sup>	Bars number along axis-2	Bars number along axis-3
12	7012	21	12
14	7081	17	9
16	7238	16	7
18	7125	13	6
20	7540	10	5
25	7854	6	4

The design of the column using CSI programs requires pre-setting the dimensions of the concrete section, the concrete properties, the reinforcement bars diameter, and the reinforcement bars material properties. Moreover, before the designing process, the user must define the distribution of the reinforcement bars along the both principal axes of the section. This distribution of bars within the column section, which is required to start designing in CSI programs, is one of the design results using the new program. For comparison, let the bars distribution calculated by the new program e. g. (shown in Table 3) be applied to design the column using ETABS. The results and the comparison between the two programs are presented in Table 4.

Table 4 shows that the relative difference between the amount of reinforcement calculated by the new program and the the amount of reinforcement calculated using ETABS ranges between (0.057–3.425 %), which shows an agreement between the results when using the same bars distribution in the column section.

According to ETABS, the result of design is given in the form of reinforcement amount (the reinforcement area (mm<sup>2</sup>) required in the concrete section) corresponding to the

**Table 4. Comparison between the reinforcement amount calculated by the new program and ETABS**

Bar size, mm	Bars number		Reinforcement amount, mm <sup>2</sup>		Relative difference, %
	along axis-2	along axis-3	The new program	ETABS	
12	21	12	7012	7008	0.057
14	17	9	7081	7120	0.551
16	16	7	7238	7164	1.022
18	13	6	7125	7267	1.993
20	10	5	7540	7349	2.533
25	6	4	7854	7585	3.425

distribution of bars chosen. Table 5 shows the amount of required reinforcement calculated using ETABS for different distribution of the bars of different diameters.

**Table 5. The reinforcement amount (mm<sup>2</sup>) calculated by ETABS, according to different values of bars distribution**

Bar size, mm	The number of bars along the principal directions							
	axis-2	axis-3	axis-2	axis-3	axis-2	axis-3	axis-2	axis-3
	21	12	8	4	5	3	2	2
12	7008		6592		6440		5228	
14	7120		6733		6526		5291	
16	7164		6886		6623		5355	
18	7267		7045		6761		5422	
20	7349		7211		6905		5489	
25	7585		7655		7284		5663	

As can be seen from Table 5, the choice of the distribution of bars in the section before the design greatly affects the design results, and the chosen distribution may not be the best distribution (which provides the required resistance with the least amount of reinforcement) within the concrete section.

**4. Conclusion.** Thus, the new numerical procedure is presented for designing rectangular reinforced concrete columns under combined biaxial bending and axial load. Using the new procedure, the program gives more detailed results when designing the column, compared to existing engineering packages: the calculated reinforcement amount is represented as a group of bars of a certain diameter, distributed regularly along the sides of the column section. In contrast to CSI programs, the new program does not require pre-setting the distribution of bars before designing. The choice of the distribution of bars in the section before design greatly affects the design results, and the pre-selected distribution may not be the best distribution of bars within the concrete section. The proposed procedure is realized within two methods: accurate method of calculation of the column capacity interaction volume; the elliptical approximation of the column capacity interaction volume. The use of the new procedure within the second method gives results very close to the first one, but requires much less time for calculation. This is very important when designing large structures with a large number of columns.

The program can be downloaded for free from this site (<https://www.amsprogram.ru/>).

## References

1. Computers and Structures Inc. *Integrated analysis, design and drafting of building systems*. Available at: <https://www.csiamerica.com/> (accessed: May 13, 2022).

2. Autodesk Inc. *Robot structural analysis*. Available at: <https://www.autodesk.com/products/robot-structural-analysis/overview/> (accessed: May 13, 2022).
3. Bentley Systems Inc. *STAAD 3D structural analysis and design software*. Available at: <https://www.bentley.com/en/products/brands/staad/> (accessed: April 02, 2022).
4. Ibraheem A. Elastic-plastic analysis of reinforced concrete frame buildings: Developing a new software package. *Journal of Physics. Conference Series*, 2021, vol. 1959, iss. 1, no. 012023. Available at: <http://www.scopus.com/inward/record.url?scp=85111954811&partnerID=8YFLogxK> (accessed: April 02, 2022).
5. Ibraheem A., Pronina Y. Accounting for shallow foundation settlement in the analysis and design of multi-storey frame buildings: Development of a new software package. *Procedia Structural Integrity*, 2021, vol. 33, pp. 942–953. Available at: <http://www.scopus.com/inward/record.url?scp=85120681412&partnerID=8YFLogxK> (accessed: April 02, 2022).
6. Computers and Structures Inc. *Concrete frame design manual ACI 318-14 for ETABS® 2016*. California, Walnut Creek, Computers and Structures Inc. Publ., 2016, 82 p.
7. American concrete institute committee 318. *Building code requirements for structural concrete (ACI 318-14) and commentary (ACI 318R-14)*. Michigan, Farmington Hills, American Concrete Institute Publ., 2014, 524 p.
8. Furlong W., Hsu T., Mirza S. Analysis and design of concrete columns for biaxial bending — Overview. *ACI Structural Journal*, 2004, pp. 413–423.
9. Bresler B. Design criteria for reinforced columns under axial load and biaxial bending. *ACI Journal*, 1960, vol. 57, pp. 481–490.
10. Monti G., Alessandri S. Assessment of RC columns under combined biaxial bending and axial load. *International Concrete Federation Proceedings of the Second International Congress Naples*. Italy, 2006, vol. 2, pp. 1–12.
11. Abakarov A., Pronina Y., Kachanov M. Symmetric arrangements of cracks with perturbed symmetry: extremal properties of perturbed configurations. *International Journal of Engineering Science*, 2022, vol. 171(4), no. 103617. <http://doi.org/10.1016/j.ijengsci.2021.103617>
12. Abakarov A. M., Pronina Yu. G. On the effective elastic properties of a material with mutually perpendicular systems of parallel cracks. *Vestnik of Saint Petersburg University. Applied Mathematics. Computer Science. Control Processes*, 2022, vol. 18, iss. 1, pp. 111–119. <https://doi.org/10.21638/11701/spbu10.2022.09>

Received: April 07, 2022.

Accepted: May 05, 2022.

#### Authors' information:

Anas Akram Ibraheem — Postgraduate Student; [st072637@student.spbu.ru](mailto:st072637@student.spbu.ru)

Yulia G. Pronina — Dr. Sci. in Physics and Mathematics, Professor; [y.pronina@spbu.ru](mailto:y.pronina@spbu.ru)

### Об оптимальном проектировании железобетонных колонн, находящихся под совместным действием двусосного изгиба и осевой нагрузки

А. А. Ибрахим, Ю. Г. Пронина

Санкт-Петербургский государственный университет, Российская Федерация, 199034, Санкт-Петербург, Университетская наб., 7–9

**Для цитирования:** Ibraheem A. A., Pronina Yu. G. On optimal design of reinforced concrete columns subjected to combined biaxial bending and axial load // Вестник Санкт-Петербургского университета. Прикладная математика. Информатика. Процессы управления. 2022. Т. 18. Вып. 2. С. 218–230. <https://doi.org/10.21638/11701/spbu10.2022.203>

В данной статье представлена новая процедура для проектирования прямоугольных колонн, находящихся под совместным действием двусосного изгиба и осевой нагрузки. Разработанная процедура реализована в новом комплексном программном обеспечении для анализа и проектирования зданий. По сравнению с существующими инженерными пакетами предложенная программа не требует предварительного задания распределе-

ния стержней по сечению колонны перед началом проектирования и дает более детальные результаты: не только необходимое количество арматуры, но и распределение стержней определенного диаметра по сторонам секции колонны. Сначала программа выполняет расчет для четырех арматурных стержней, расположенных в углах колонны, проверяя, обеспечивают ли они требуемое сопротивление приложенным нагрузкам. Если железобетонная колонна не выдерживает приложенных нагрузок, то программа увеличивает количество арматуры, добавляя новые стержни, и снова проверяет сопротивляемость нагрузкам. Этот процесс продолжается до тех пор, пока железобетонная колонна не сможет выдерживать заданные нагрузки. Предлагаемая процедура реализуется в рамках следующих методов: (I) построение поверхности разрушения с использованием большого количества кривых взаимодействия (обычно 24 кривые); (II) эллиптическая аппроксимация поверхности разрушения. Во втором методе программа рассчитывает только две кривые взаимодействия для эксцентричного случая: первая — в направлении  $X$ , а вторая — в направлении  $Y$ . В обоих методах кривые взаимодействия рассчитываются в соответствии со стандартами American concrete institute. Использование новой процедуры в рамках второго метода дает результаты, очень близкие к первому, наиболее точному, методу, но при этом требует гораздо меньше времени для расчета. Последнее обстоятельство очень важно при проектировании объемных конструкций с большим числом колонн.

*Ключевые слова:* железобетонная колонна, двухосный изгиб, осевая нагрузка, поверхность разрушения, проектирование зданий.

Контактная информация:

*Ибрагим Анас Акрам* — аспирант; st072637@student.spbu.ru

*Пронина Юлия Григорьевна* — д-р физ.-мат. наук, проф.; y.pronina@spbu.ru